


TX-KSS SERIES


TX-PLUG-IN

MODEL **TX10KSS**

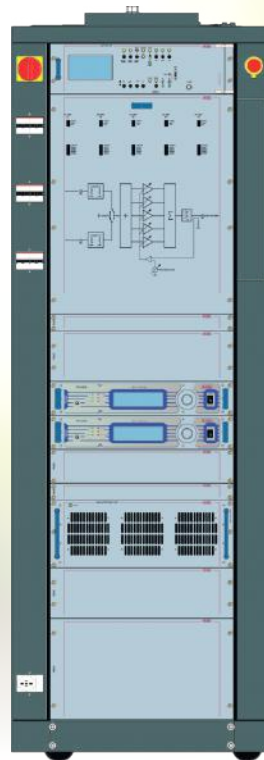

ORDERING INFORMATION

Model	Description
TX10KSS	10.000W PLUG-IN system.
TX10KSS/00D41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + 2x BLUES30NV).
TX10KSS/01D41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + 2x TEX30LCD/S).
TX10KSS/20D41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + 2x PTX30LCD/S).
TX10KSS/41D41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + 2x PTX30LCDDSP).
TX10KSS/60D41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + 2x PTX30DDS).
TX10KSS/00S41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + BLUES30NV).
TX10KSS/01S41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + TEX30LCD/S).
TX10KSS/20S41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + PTX30LCD/S).
TX10KSS/41S41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + PTX30LCDDSP).
TX10KSS/60S41	Plug-in transmitter, 10kW (composed of PJ10KPS-CA + PTX30DDS).

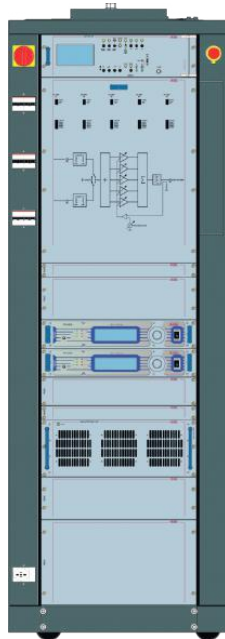**TX10KSS/60D41**

Plug-in transmitter, 10kW
(composed of PJ10KPS-CA + 2x PTX30DDS).

FEATURES

- Tunable over entire FM band (87.5 – 108 MHz), without tuning.
- Overall efficiency better than 70%.
- Hot-pluggable and broadband power amplifier modules.
- Each module features switching mode power supply to control and stabilize power supply voltage.
- Each amplifier module provides Automatic Power Control.
- Suitable for mono & stereo broadcast operations.
- Protection against high VSWR, overdrive, overcurrent and overtemperature.
- Compliance to IEC safety standards.
- Compliance to ETSI – CCIR – FCC standards.
- Entire transmitter can be switched off through an emergency button.
- High redundancy guaranteed by 3 power modules of 2.2 kW RF power.
- All measurement and working parameters are displayed on front panel.
- Remotely controllable by telemetry system.
- Design for 24/7 non-stop operation.
- The transmitter include an integrated system for automatic and manual switching between two exciters.
- In Automatic mode the changeover is activated when active power of exciter falls below 3dB.

TX10KSS/60D41

Parameters	U.M.	Value	Notes
GENERALS			
RF Output Power	kW	10,5	
Frequency Range	MHz	87,5 – 108	
Frequency Stability	ppm	> 1	
Frequency programmability		By software, with 1, 10, 100, 1000 kHz steps	
Nominal Frequency Deviation		±75 KHz (peak)	
Maximum Frequency Deviation		±150 KHz (peak)	
Class of Emission		180KF8E Direct to Channel	
Modulation Mode		Mono, Stereo, Multiplex, SCA, RDS, Aux	
Stereo transmissions		Acc. to ITU-R / Rec. 450 (Pilot tone)	
RF Output Impedance		50 Ω, Unbalanced	
RF Output Connector		1-5/8" EIA Flange	
VSWR		1.4:1 with automatic fold-back at higher VSWR	
Pre-emphasis Mode		0/50 (CCIR) μs, 75 (FCC) μs	
Asynchronous AM S/N Ratio		Typically >70dB	
Synchronous AM S/N Ratio		Typically > 55dB	
Harmonics suppression and Spurious		Typically <85db	
Overall efficiency		Typically > 70%	
RF Harmonics		Exceeds ETSI/CCIR/FCC requirements	
RF Spurious		Exceeds ETSI/CCIR/FCC requirements	
Analogue Input Level {+75 KHz (peak) deviation }		-12,5 dBu - +12,5 dBu (adjustable)	
Digital Input Level {+75 KHz (peak) deviation }		-20,0 dBFS - 0 dBFS (adjustable)	
MONO OPERATION			
S/N ratio	dB	Typically > 83	
Total Harmonic Distortion + Noise	%	Typically <0,03	
Inter Modulation Distortion SMPTE	%	Typically <0,02	
Frequency Response	dB	Typically ±0,2	
Audio Input Impedance		600 Ω or 10 kΩ	
MPX OPERATION			
Composite S/N ratio	dB	Typically > 80	
Total Harmonic Distortion + Noise	%	Typically <0,05	
Inter Modulation Distortion	%	Typically <0,05	
Frequency Response	dB	Typically ±0,2	
Audio Input Impedance		10 kΩ	
STEREO OPERATION			
Stereo FM S/N Ratio	dB	Typically > 83	
Total Harmonic Distortion + Noise (L or R)	%	Typically <0,02	
Inter Modulation Distortion SMPTE (L or R)	%	Typically <0,02	
Frequency response (L or R)	dB	Typically ±0,2	
Linear Cross Talk	dB	Typically > 50	
Non-linear Cross Talk	dB	Typically > 50	
Stereo Separation (Sine Wave)	dB	Typically > 70	
Audio Input Impedance		600 Ω or 10 kΩ	
Digital Input Impedance		110 Ω	

All pictures are RVR's property and they are only indicative and not binding. The pictures can be modified without notice. These are general specifications. They show typical values and are subject to change without notice.



R.V.R. Elettronica S.r.l.
Via del Fonditore 2/2 c
40138 Bologna - Italy
Phone +39 051 6010506
info@rvr.it

www.rvr.it