


Radio Links

> **Synthesized transmitters and receivers series (1.4÷1.8, 2.3÷2.5 GHz in bandwidths of 20 MHz)**

PTRLNV/4 RXRLNV/4

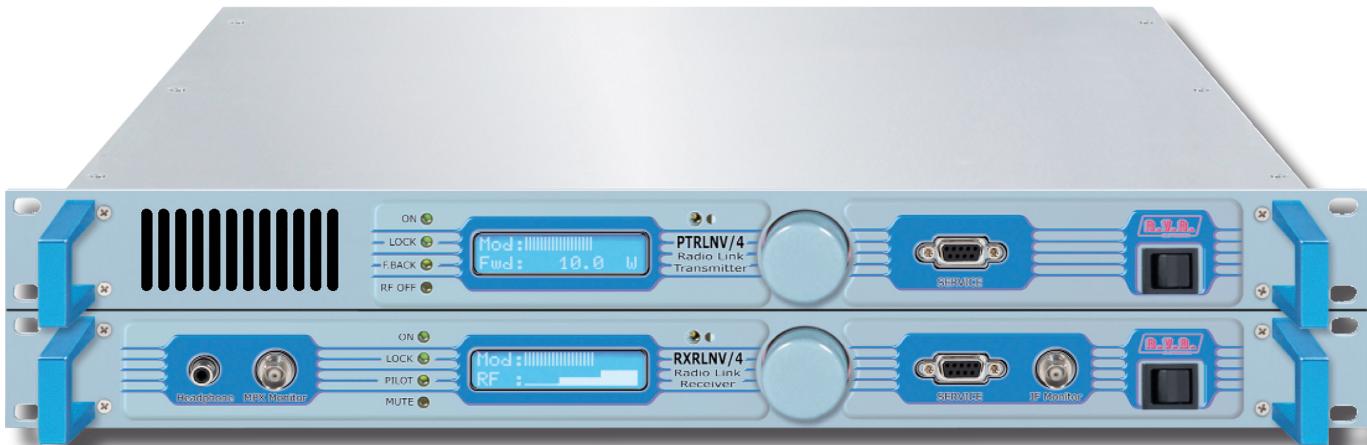

PTRLNV/4 & RXRLNV/4 front view

Features

- > **PRIMARY APPLICATION:** Link to carry audio signals to support sound FM radio broadband broadcasting.
- > **RADIO LINKS TOPICS:** optimal price/performance ratio recognized worldwide.
- > **AUDIO PERFORMANCE:** low distortion and intermodulation values, combined with a high noise/signal ratio, provide high performance also together with an integrated stereo coder with L&R, Mono, MPX (composite signal) analog audio and auxiliary SCA/RDS inputs. The stereo coder is available as an option.
- > **HARDWARE FEATURES:** extremely compact and indeformable thanks to their stainless steel chassis, in 1 rack units (**1HE**) each only.
- > **WORKING FREQUENCIES:** standard working frequency bands are **1,4÷1,8 GHz or 2,3÷2,5 GHz** MHz of 20 MHz and selectable in steps of 25kHz. Working frequency (hence, the frequency band) must be specified on order.

Caratteristiche

- > **PRIMARY APPLICATION:** Link per il trasporto di segnali audio in ausilio alla radiodiffusione sonora a banda larga in modulazione di frequenza.
- > **RADIO LINK TOPIC:** Ottimo rapporto prezzo/prestazioni riconosciuto a livello mondiale.
- > **AUDIO PERFORMANCE:** bassi valori di distorsione e intermodulazione, uniti ad un alto rapporto di segnale/rumore, offrono elevate prestazioni anche unite ad uno stereo coder integrato con ingressi audio analogici L&R, Mono e segnale composito MPX ed ausiliari per segnali SCA / RDS. Lo stereo coder è venduto opzionalmente.
- > **HARDWARE FEATURES:** estremamente compatto e indeformabile perché realizzato in chassis di acciaio inox, in sole 1 unità rack (**1HE**).
- > **WORKING FREQUENCIES:** la frequenza di lavoro standard **1,4÷1,8 GHz o 2,3÷2,5 GHz** a bande di 20MHz (va specificata al momento dell'ordine) e' selezionabile a passi di 25kHz.
- > **RELIABILITY/CONTINUITY:** elevata continuità di esercizio ga-

- > **RELIABILITY/CONTINUITY:** enhanced business continuity guaranteed in all working conditions through an APC automatic control and a Foldback protection. The presence a **24VDC** connector connected to a battery or other power source ensures uninterrupted operation in the event of mains failure.
- > **USER-FRIENDLY FEATURES:** universal **80-260 V** multi-voltage power supply enables operation on different mains voltages with no need to preselect voltage. Pushbuttons for user/device interaction provide enhanced accessibility, resulting in extreme ease of use. Configuration software offers a simple, intuitive interface.
- > **INTERFACE CONTROL:** total control thanks to microprocessor with all key parameters displayed on LCD.
- > **EASE OF MAINTENANCE:** advanced module engineering ensures extreme ease of access and simple maintenance.

rantita in qualsiasi condizione di lavoro attraverso un controllo automatico APC ed una protezione di Foldback. La presenza del connettore **24VDC** collegato a una batteria o fonte di alimentazione alternativa, permette all'apparato il funzionamento anche in caso di interruzione dell'alimentazione di rete.

- > **USER-FRIENDLY FEATURES:** utilizzabili a diverse tensioni di rete per mezzo di un'alimentatore universale multivoltaggio da **80 V a 260 V** senza necessita' di preselezione. Estrema semplicità d'utilizzo, data dall'accessibilità fornita dai tasti a pressione per l'interazione fra l'utente e l'apparato. Interfaccia del software di configurazione intuitiva e semplificata.
- > **INTERFACE CONTROL:** controllo completo basato su microprocessore e da menu con lettura su display LCD di tutti i parametri principali.
- > **REGULATORY COMPLIANCE:** estrema accessibilità e semplicità di manutenzione grazie ad una avanzata ingegnerizzazione modulare dell'apparato.

BROADCAST EQUIPMENT

Technical specifications

Parameter	PTRLNV/4 /S-PTNV4	RXRLNV/4	RXRLNV/4 /05-RXRLNV4
GENERALS			
Frequency range	work bandwidth is 20MHz	1400 ÷ 1800 / 2300 ÷ 2500 MHz	
Rated output power		5 W	
Modulation Type		Direct carrier frequency	
Sensitivity RF	@ 25dB S/N		-100 dBm
Operational mode		Mono, MPX	Mono, Stereo , MPX
Ambient working temperature		-10 °C to + 50 °C / 95% relative Humidity non condensing	
Frequency programmability		From software, with 25 kHz steps	
Frequency stability	WT from -10°C to 50°C	±1 ppm	
Modulation capability		130 kHz	
Emphasis mode		0 , 50 , 75 µS	
POWER REQUIREMENTS			
AC Power Input	AC Supply Voltage	80 ÷ 260 VAC Full range	
	Active Power Consumption	70 W	20 W
	Connector	VDE IEC Standard	
DC Power Input	DC Supply Voltage	12 – 30 VDC	
	DC Current	< 2 A	
MECHANICAL DIMENSIONS			
Physical Dimensions	L x H x W	483 mm x 88 mm x 390 mm	
Weight		about 5,5 kg	about 4 kg
Cooling		Forced, with internal fan	Convection cooling
Acoustic Noise		< 58 dBA	0 dBA
INPUTS / OUTPUTS			
Left/Mono & Right		10 kOhm or 600 Ohm (XLR F) Level:-13 to +13 dBu	100 Ohm (XLR F) Level:-10 to +12 dBu
MPX		10 kOhm or 50 Ohm (BNC) Level: -13 to +13 dBu @ 75 KHz FM	100 Ohm (2x BNC) Level: -10 to +7 dBu @ 75 KHz FM
SCA/RDS		10 kOhm (2x BNC) Level: -8 to +13 dBu @ 7,5 KHz FM	100 Ohm (2x BNC) Level: -10 to +7 dBu @ 7,5 KHz FM
RF		50 Ohm (N type)	50 Ohm (N type)
RF Monitor		50 Ohm (BNC) approx. -30 dBc	
Pilot output		>300 Ohm (BNC) approx.1Vpp	
FUSES			
On Mains		1 External fuse F 3,15 T - 5x20 mm	

All pictures are RVR's property and they are only indicative and not binding. The pictures can be modified without notice.
 These are general specifications. They show typical values and are subject to change without notice.

CE ! 99/5/CE Revision: 05/16

radio links

Ordering Information

Code - Codice	Description - Descrizione
Versions for PTRLNV/4 – Versioni per PTRLNV/4	
PTRLNV/4.XXXX-XXXX	Transmitter 1,5 ÷ 2,5 GHz in step of 20MHz. Please specify the operating frequency at order placement. Trasmettitore 1,5 ÷ 2,5 GHz in step di 20MHz. Si prega di specificare la frequenza di funzionamento al momento dell'ordine.
Versions for RXRLNV/4 – Versioni per RXRLNV/4	
RXRLNV/4.XXXX-XXXX	Receiver from 1,5 ÷ 2,5 GHz in step of 20MHz. Please specify the operating frequency at order placement. Ricevitore 1,5 ÷ 2,5 GHz in step di 20MHz. Si prega di specificare la frequenza di funzionamento al momento dell'ordine.
Options for PTRLNV/4 – Opzioni per PTRLNV/4	
/S-PTNV4	Stereo coder card option. - Opzione scheda coder stereo integrata.
Options for RXRLNV/4 – Opzioni per RXRLNV/4	
/05-RXRLNV4	Stereo decoder card option. - Opzione scheda decoder stereo integrata.

